

INOX

EI₂60 C5 / EI₂90 C5 / UL90 / UL120 / UL180




Great DURABILITY, minimum maintenance

ADVANTAGES

Easy surface cleaning for maximum sanitation.
High hardness and resistance to rust and wear.
Wide range of standard sizes in two different heights for greater project savings.
Special sizes to adapt the product to any customer's needs.
Excellent torsional rigidity of the leaf.
Tested for more than 200,000 opening and closing cycles.

TECHNICAL CHARACTERISTICS

Assembled using a roll-forming machine using double folding and stitching.
53 mm thick sash made of **0.7/0.9 mm** stainless steel sheet.
Thermosetting epoxy powder-coated sheet.
100 µm paint layer on the sash and **120 µm** on the frame.
Rock wool insulation with a density of **145/180 kg/m³**.
Thermal insulation coefficient of **1.2 W/m²K**.
Zinc-plated steel anti-pry bolt.
1.5 mm thick stainless steel jambs and lintels with U-shaped profile, ASTURMADI model.
Galvanized steel stiffener.
Cold-rolled steel sheet fixing clips.
Approximate weight (single door): **70 kg**.

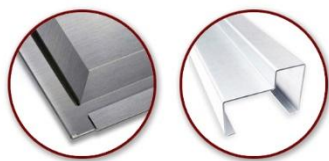

CERTIFICATES

Fire resistance (60/90 min.) according to EN 1634-1:2014.
Fire resistance according to ANSI/UL 10B-2009.
C5 durability according to EN 1191:2012.
ISO 9001:2015.

FINISHING


Standard color: **RAL 7038** gray / **RAL 9010** white

STANDARD ACCESSORIES

3 mm thick stainless steel hinges with 3D adjustment.
15 x 2 mm graphite intumescent gasket.
CF reversible double-lock mortise lock, recessed in the leaf and protected by two MO stuccal plates.
Sintered steel latch.
40 x 40 nickel-plated cylinders with **3 keys**.
CF anti-snap handle with steel core, coated with matte black polypropylene.




INOX

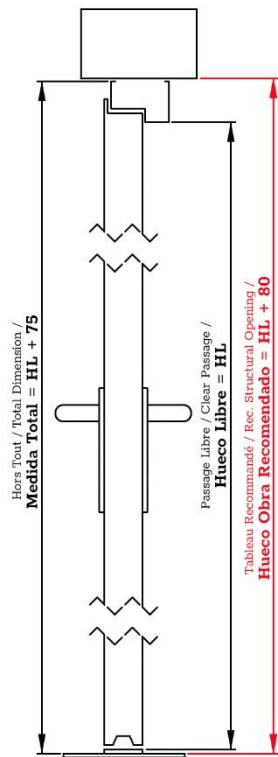EI₂60 C5 / EI₂90 C5 / UL90 / UL120 / UL180

ANCHO STANDARD / Standard Width / Largeur Standard		
HUECO LIBRE Clear Passage Passage Libre	MEDIDA TOTAL Total Dimension Hors Tout	HUECO OBRA RECOMENDADO Rec. Structural Opening Tableau Recommandé
600	725	735
700	825	835
810	935	945
900	1025	1035
930	1055	1065
1000	1125	1135
1100	1225	1235
1200	1325	1335

ALTO STANDARD / Standard Height / Hauteur Standard		
HUECO LIBRE Clear Passage Passage Libre	MEDIDA TOTAL Total Dimension Hors Tout	HUECO OBRA RECOMENDADO Rec. Structural Opening Tableau Recommandé
2000	2075	2080
2100	2175	2180

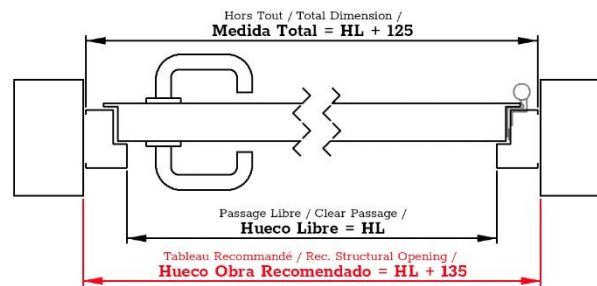

ANCHO STANDARD / Standard Width / Largeur Standard				MEDIDA TOTAL Total Dimension Hors Tout	HUECO OBRA RECOMENDADO Rec. Structural Opening Tableau Recommandé
ACT	PAS		=		
600	600		1245	1370	1380
700	600		1345	1470	1480
700	700		1445	1570	1580
810	700		1555	1680	1690
810	810		1665	1790	1800
900	810	+ 45	1755	1880	1890
900	900		1845	1970	1980
1000	900		1945	2070	2080
1000	1000		2045	2170	2180
1100	1000		2145	2270	2280
1100	1100		2245	2370	2380

ALTO STANDARD / Standard Height / Hauteur Standard		
HUECO LIBRE Clear Passage Passage Libre	MEDIDA TOTAL Total Dimension Hors Tout	HUECO OBRA RECOMENDADO Rec. Structural Opening Tableau Recommandé
2000	2075	2080
2100	2175	2180

