

MULTIUSOS FLAME PROOF



Heavy-duty multi-purpose door: robust design, maximum versatility and superior performance in any environment

ADVANTAGES

Wide range of standard sizes in two different heights for greater project savings.
Special sizes to adapt the product to any customer's needs.
Excellent torsional rigidity of the leaf
Tested for more than **200,000** opening and closing cycles.

TECHNICAL CHARACTERISTICS

Assembly using a roll-forming machine using double folding and stitching of the entire unit.
53 mm thick of leaf made of **0.6/0.9 mm** galvanized steel sheet.
Thermosetting epoxy powder-coated sheet.
100 µm paint layer on the sash and 120 µm on the frame.
Rock wool insulation with a density of **70 kg/m³**.
Thermal insulation coefficient of **1.2 W/m²k**.
1.2 mm thick galvanized steel frame with a Z-shaped profile, ASTURMADI model.
Galvanized steel stiffener
Cold-rolled steel sheet fixing clamps.
Approximate weight (single door): **50 kg**.



CERTIFICATES

Fire resistance (30/60 min.) according to **EN 1634-1:2014** (exposed hinge side).
ISO 9001:2015

FINISHES

Standard color: **RAL 7038** gray.
RAL 9010 white available at no additional cost.
Availability in Decora finishes (please inquire).

STANDARD ACCESSORIES


3 mm thick steel hinges.
CF reversible double-lock mortise lock, recessed into the leaf and protected by two MO stucal plates.
Sintered steel latch.
Nickel-plated cylinders, 40x40 mm, with **3 keys**.
CF anti-snap handle with steel core, coated with matte black polypropylene.

Optional accessories

Anti-lever bolt
Self-closing hinge




MULTIUSOS PARALLAMAS

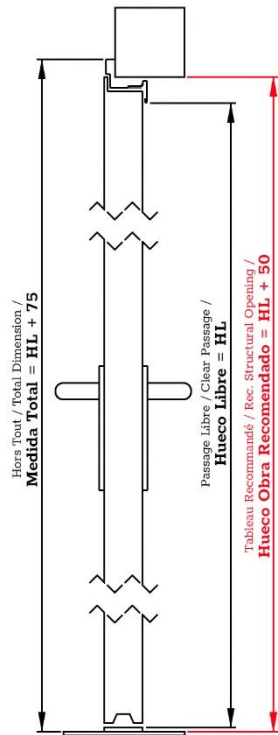

ANCHO STANDARD / Standard Width / Largeur Standard		
HUECO LIBRE Clear Passage Passage Libre	HUECO OBRA RECOMENDADO Rec. Structural Opening Tableau Recommandé	MEDIDA TOTAL Total Dimension Hors Tout
600	680	725
700	780	825
810	890	935
900	980	1025
930	1010	1055
1000	1080	1125
1100	1180	1225
1200	1280	1325

ALTO STANDARD / Standard Height / Hauteur Standard		
HUECO LIBRE Clear Passage Passage Libre	HUECO OBRA RECOMENDADO Rec. Structural Opening Tableau Recommandé	MEDIDA TOTAL Total Dimension Hors Tout
2000	2050	2075
2100	2150	2175

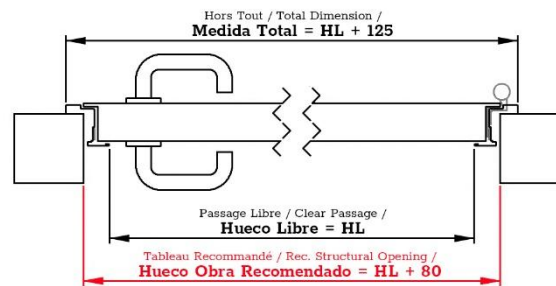

ANCHO STANDARD / Standard Width / Largeur Standard				
HUECO LIBRE Clear Passage Passage Libre			HUECO OBRA RECOMENDADO Rec. Structural Opening Tableau Recommandé	MEDIDA TOTAL Total Dimension Hors Tout
ACTIVA	PASIVA	=		
600	600		1245	1370
700	600		1345	1470
700	700		1445	1570
810	700		1555	1680
810	810		1665	1790
900	810	+ 45	1755	1880
900	900		1845	1970
1000	900		1945	2070
1000	1000		2045	2170
1100	1000		2145	2270
1100	1100		2245	2370

ALTO STANDARD / Standard Height / Hauteur Standard		
HUECO LIBRE Clear Passage Passage Libre	HUECO OBRA RECOMENDADO Rec. Structural Opening Tableau Recommandé	MEDIDA TOTAL Total Dimension Hors Tout
2000	2050	2075
2100	2150	2175

