

VENTILA

EI₂60 C5 / EI₂90 C5



Certified fire resistance with efficient ventilation for spaces that require it

ADVANTAGES

Ideal for basements, garages, vacuum chambers, etc.
Wide range of standard sizes in two different heights for greater project savings.
Special sizes to adapt the product to any customer's needs.
Excellent torsional rigidity of the leaf.
Tested for more than **200,000 opening** and closing cycles.

TECHNICAL CHARACTERISTICS

Assembled using a roll forming machine using double folding and stitching.
53 mm thick sheet made of **0.7/0.9 mm** galvanized steel sheet. Sheet coated with thermosetting epoxy powder.
100 µm paint layer on the sheet and **120 µm** on the frame.
Rock wool insulation with a density of **145/180 kg/m³**.
Thermal insulation coefficient of **1.2 W/m²k**.
Zinc-plated steel anti-lever bolt.
1.5 mm thick galvanized steel frame with a **Z-shaped** profile, ASTURMADI model.
Galvanized steel
Clamping claws for cold-rolled steel sheet.
Approximate weight (single door): **60 kg**.

CERTIFICATES



Fire resistance (60/90 min.) according to **EN 1634-1:2014**.
Durability C5 according to **EN 1191:2012**.
ISO 9001:2015

FINISHING

Standard color: **RAL 7038** gray / **RAL 9010** white


STANDARD ACCESSORIES

3 mm thick steel hinges, the lower one with semi-automatic closing.
15 x 2 mm graphite intumescent gasket.
CF reversible double-lock mortise lock, recessed in the leaf and protected by two MO stucal plates.
Sintered steel latch.
40 x 40 nickel-plated cylinders with **3 keys**.
CF model anti-snap handle with steel core, coated with matte black polypropylene.
150 x 150 mm grill (Consult the possibility of three grilles per leaf).




VENTILA

El260 C5 / El290 C5

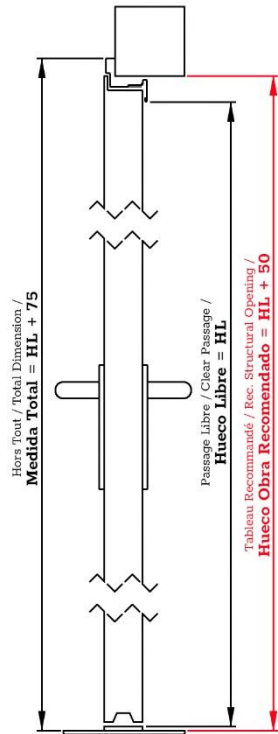

ANCHO STANDARD / Standard Width / Largeur Standard		
HUECO LIBRE Clear Passage Passage Libre	HUECO OBRA RECOMENDADO Rec. Structural Opening Tableau Recommandé	MEDIDA TOTAL Total Dimension Hors Tout
600	680	725
700	780	825
810	890	935
900	980	1025
930	1010	1055
1000	1080	1125
1100	1180	1225
1200	1280	1325

ALTO STANDARD / Standard Height / Hauteur Standard		
HUECO LIBRE Clear Passage Passage Libre	HUECO OBRA RECOMENDADO Rec. Structural Opening Tableau Recommandé	MEDIDA TOTAL Total Dimension Hors Tout
2000	2050	2075
2100	2150	2175

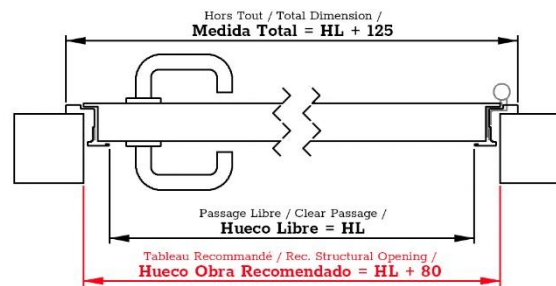

ANCHO STANDARD / Standard Width / Largeur Standard				
HUECO LIBRE Clear Passage Passage Libre			HUECO OBRA RECOMENDADO Rec. Structural Opening Tableau Recommandé	MEDIDA TOTAL Total Dimension Hors Tout
ACTIVA	PASIVA	=		
600	600	1245	1325	1370
700	600	1345	1425	1470
700	700	1445	1525	1570
810	700	1555	1635	1680
810	810	1665	1745	1790
900	810	1755	1835	1880
900	900	1845	1925	1970
1000	900	1945	2025	2070
1000	1000	2045	2125	2170
1100	1000	2145	2225	2270
1100	1100	2245	2325	2370

ALTO STANDARD / Standard Height / Hauteur Standard		
HUECO LIBRE Clear Passage Passage Libre	HUECO OBRA RECOMENDADO Rec. Structural Opening Tableau Recommandé	MEDIDA TOTAL Total Dimension Hors Tout
2000	2050	2075
2100	2150	2175

